

Overlapping Two-Door Enclosures

Application -

Designed to house electrical and electronic controls, instruments and components. Provides protection from dust, oil and water. For outdoor application a drip shield and drain holes are required. For installation information, consult our installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" carbon steel.
- Seams continuously welded and ground smooth, no holes or knockouts.
- Strong, rigid construction with body stiffeners.
- Gasketed overlapping doors eliminate need for center post.
- Black zinc die cast keylocking/padlocking handle.
- 3-point latching mechanism.
- Latch rods ramp strodes for easier door closing.
- Concealed hinges.
- Removable pint pocket.
- 12" removable floor stands.
- Heavy duty lifting eyes.
- Panel supports.
- Oil resistant door gasket.
- Collar studs for mounting optional sub-panel.
- Ground stud on door and body.
- Provisions for light kit.
- Hole plugs provided to seal holes in bottom of enclosure.

Finish -

ANSI-61 grey powder coated inside and out. Optional sub-panels powder coated white.

IS3 - Industry Standards -

NEMA Type 3R, 12 & Type 13
UL Listed Type 3R & 12
CSA Type 3R & 12
IEC 60529 IP35

***Special instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the technical Information Section.

OVERLAPPING TWO-DOOR ENCLOSURES

Catalog No.	ENCLOSURE PRODUCT CODE A2				SUB-PANEL (P3)				List Price	Panel Height (D)	Panel Width (E)	List Price
	Height (A)	Width (B)	Depth (C)	Industry Standard	Height (D)	Width (E)	Depth (F)	Industry Standard				
SCE-604808LP	60.00	48.00	8.00	IS3	1.491.36	SCE-60P48	56.00	44.00	268.38	56.00	44.00	268.38
SCE-604810LP	60.00	48.00	10.00	IS3	1.539.48	SCE-60P48	56.00	44.00	268.38	56.00	44.00	268.38
SCE-604812LP	60.00	48.00	12.00	IS3	1.597.57	SCE-60P48	56.00	44.00	268.38	56.00	44.00	268.38
SCE-604816LP	60.00	48.00	16.00	IS3	1.881.28	SCE-60P48	56.00	44.00	268.38	56.00	44.00	268.38
SCE-604824LP	60.00	48.00	24.00	IS3	1.873.69	SCE-60P48	56.00	44.00	268.38	56.00	44.00	268.38
SCE-606010LP	60.00	60.00	10.00	IS3	1.724.30	SCE-60P60	56.00	56.00	331.68	56.00	56.00	331.68
SCE-606012LP	60.00	60.00	12.00	IS3	1.777.47	SCE-60P60	56.00	56.00	331.68	56.00	56.00	331.68
SCE-606016LP	60.00	60.00	16.00	IS3	1.883.81	SCE-60P60	56.00	56.00	331.68	56.00	56.00	331.68
SCE-606024LP	60.00	60.00	24.00	IS3	2.096.51	SCE-60P60	56.00	56.00	331.68	56.00	56.00	331.68
SCE-726010LP	72.00	60.00	10.00	IS3	1.972.44	SCE-72P60	68.00	56.00	394.98	68.00	56.00	394.98
SCE-726012LP	72.00	60.00	12.00	IS3	2.033.21	SCE-72P60	68.00	56.00	394.98	68.00	56.00	394.98
SCE-726016LP	72.00	60.00	16.00	IS3	2.152.21	SCE-72P60	68.00	56.00	394.98	68.00	56.00	394.98
SCE-726024LP	72.00	60.00	24.00	IS3	2.395.28	SCE-72P60	68.00	56.00	394.98	68.00	56.00	394.98
SCE-727210LP	72.00	72.00	10.00	IS3	2.197.78	SCE-72P72	68.00	68.00	470.93	68.00	68.00	470.93
SCE-727212LP	72.00	72.00	12.00	IS3	2.263.61	SCE-72P72	68.00	68.00	470.93	68.00	68.00	470.93
SCE-727216LP	72.00	72.00	16.00	IS3	2.395.28	SCE-72P72	68.00	68.00	470.93	68.00	68.00	470.93
SCE-727224LP	72.00	72.00	24.00	IS3	2.866.62	SCE-72P72	68.00	68.00	470.93	68.00	68.00	470.93




Back to
Free-Standing
Enclosures

Phone (989) 799-6871
Fax (989) 799-4524

SCE
SAGINAW CONTROL & ENGINEERING
Your Enclosure Source™

OVERLAPPING TWO-DOOR ENCLOSURES TECHNICAL DATA

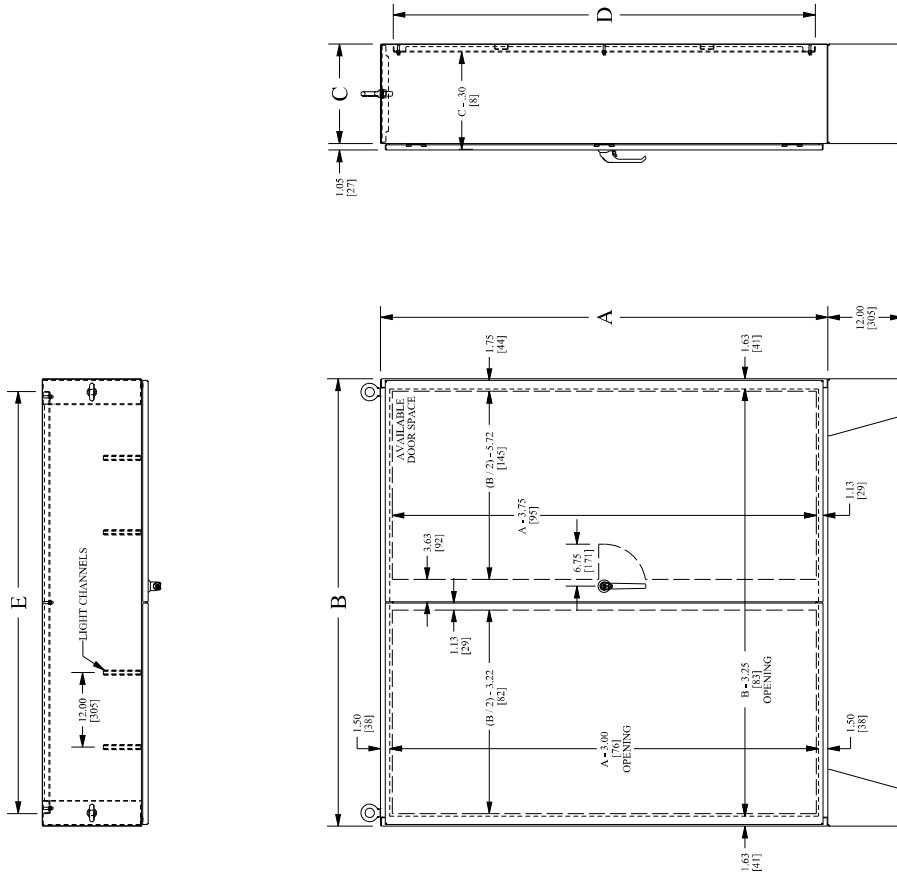

Phone (989) 799-6871
Fax (989) 799-4524

SCE
SAGINAW CONTROL & ENGINEERING
Your Enclosure Source™