

Heavy Duty Free-Standing Enclosures For Flange-Mounted Disconnects

Application -
Designed to house electrical equipment and provide degree of protection from dirt, dust, oil and water and to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

- Construction -**
- 0.125" carbon steel.
 - Seams continuously welded and ground smooth.
 - Flange trough collar around all sides of door opening.
 - Body stiffeners in large enclosures for extra rigidity.
 - Heavy duty lifting eyes anchor into reinforced reinforced top.
 - Removable center posts permit easy sub-panel installation.
 - Concealed hinges.
 - Black zinc die cast comproof/padlocking handle on main door with black zinc die cast padlocking handle on slave doors.
 - 3-point latching mechanism.
 - Ends of latch rods have ramp shoes for easier door closing.
 - Panel supports.
 - Large removable print pockets.
 - Oil-resistant gasket.
 - Removable sub-panels mount on collar studs.
 - Defeater on master door requires a screwdriver to open.
 - Hole plugs provided to seal holes in bottom of enclosure.
 - Ground stud on door and body.
 - Provisions for light kit.
- Disconnect switch (or circuit breaker) and operating mechanism are not furnished with enclosure.**

Finish -
ANSI-61 gray powder coated inside and out. Sub-panels powder coated white.


IS3 - Industry Standards -
NEMA Type 3R, 12 & Type 13
UL Listed Type 3R & 12
CSA Type 3R & 12
IEC 60529 IP55

IS4 - Industry Standards -
NEMA Type 3R, 4, 12 & Type 13
UL Listed Type 3R, 4 & 12
CSA Type 3R, 4 & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS5 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the technical information section.

HEAVY DUTY FREE-STANDING ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS SINGLE-DOOR ENCLOSURES

ENCLOSURE PRODUCT CODE A2					SUB-PANEL (P3)				
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-72XM2818	72.00	27.50	18.00	IS4	1,565.79	SCE-6AP25**	60.00	21.75	Included
SCE-72XM2818G	72.00	27.50	18.00	IS4	1,892.07	SCE-6AP25GALV**	60.00	21.75	Included
SCE-72XM3418	72.00	33.50	18.00	IS3	1,735.38	SCE-6AP31**	60.00	27.75	Included
SCE-72XM3418G	72.00	33.50	18.00	IS3	1,763.63	SCE-6AP31GALV**	60.00	27.75	Included
SCE-72XM4018	72.00	39.50	18.00	IS3	1,904.98	SCE-6AP37**	60.00	33.75	Included
SCE-72XM4018G	72.00	39.50	18.00	IS3	1,935.02	SCE-6AP37GALV**	60.00	33.75	Included
SCE-84XM4018G	84.00	39.50	18.00	IS3	2,168.87	SCE-7BP37**	72.00	33.75	Included
SCE-84XM4024G	84.00	39.50	24.00	IS3	2,177.29	SCE-7BP37GALV**	72.00	33.75	Included
SCE-90XM4018G	90.00	39.50	18.00	IS3	2,268.06	SCE-8BP37**	78.00	33.75	Included
SCE-90XM4018G	90.00	39.50	18.00	IS3	2,268.06	SCE-8BP37GALV**	78.00	33.75	Included
SCE-90XM4024	90.00	39.50	24.00	IS3	2,428.09	SCE-8BP37**	78.00	33.75	Included
SCE-90XM4024G	90.00	39.50	24.00	IS3	2,474.01	SCE-8BP37GALV**	78.00	33.75	Included

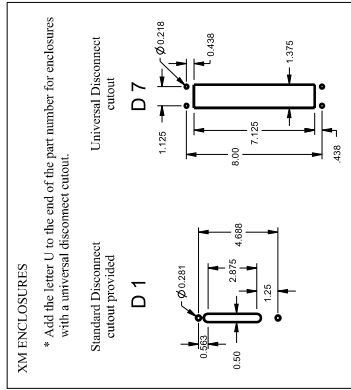

Part numbers ending in "G" have galvanized sub-panels installed.
** Sub-panel included with enclosure. Replacement sub-panels can be ordered. Prices found in the accessory section.




Phone (989) 799-6874
Fax (989) 799-4524



HEAVY DUTY FREE-STANDING ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS TWO-DOOR ENCLOSURES

ENCLOSURE PRODUCT CODE A2					SUB-PANEL (P3)				
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-72XM5418	72.00	53.75	18.00	IS4	2,748.19	SCE-6AP52**	60.00	48.00	Included
SCE-72XM5418G	72.00	53.75	18.00	IS4	2,792.29	SCE-6AP52GALV**	60.00	48.00	Included
SCE-72XM618	72.00	65.75	18.00	IS3	3,096.93	SCE-6AP64**	60.00	60.00	Included
SCE-72XM618G	72.00	65.75	18.00	IS3	3,220.91	SCE-6AP64GALV**	60.00	60.00	Included
SCE-72XM7818	72.00	77.75	18.00	IS3	3,444.49	SCE-6AP76**	60.00	72.00	Included
SCE-72XM7818G	72.00	77.75	18.00	IS3	3,561.16	SCE-6AP76GALV**	60.00	72.00	Included
SCE-72XM7824	72.00	77.75	24.00	IS3	3,691.72	SCE-6AP76**	60.00	72.00	Included
SCE-72XM7824G	72.00	77.75	24.00	IS3	3,808.59	SCE-6AP76GALV**	60.00	72.00	Included
SCE-84XM7818	84.00	77.75	18.00	IS3	3,823.10	SCE-7BP76**	72.00	72.00	Included
SCE-84XM7818G	84.00	77.75	18.00	IS3	3,934.93	SCE-7BP76GALV**	72.00	72.00	Included
SCE-84XM7824	84.00	77.75	24.00	IS3	3,970.97	SCE-7BP76**	72.00	72.00	Included
SCE-84XM7824G	84.00	77.75	24.00	IS3	4,007.90	SCE-7BP76GALV**	72.00	72.00	Included
SCE-90XM7818	90.00	77.75	18.00	IS3	4,082.27	SCE-8BP76**	78.00	72.00	Included
SCE-90XM7818G	90.00	77.75	18.00	IS3	4,220.85	SCE-8BP76GALV**	78.00	72.00	Included
SCE-90XM7824	90.00	77.75	24.00	IS3	4,284.12	SCE-8BP76**	78.00	72.00	Included
SCE-90XM7824G	90.00	77.75	24.00	IS3	4,421.86	SCE-8BP76GALV**	78.00	72.00	Included

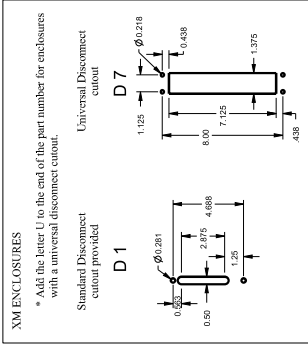

Part numbers ending in "G" have galvanized sub-panels installed.
** Sub-panel included with enclosure. Replacement sub-panels can be ordered. Prices found in the accessory section.



Phone (989) 799-6874
Fax (989) 799-4524



Heavy Duty Free-Standing Enclosures For Flange-Mounted Disconnects

Application -
Designed to house electrical equipment and provide degree of protection from dirt, dust, oil and water and to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

- Construction -**
- 0.125" carbon steel.
 - Seams continuously welded and ground smooth.
 - Flange trough collar around all sides of door opening.
 - Body stiffeners in large enclosures for extra rigidity.
 - Heavy duty lifting eyes anchor into reinforced reinforced top.
 - Removable center posts permit easy sub-panel installation.
 - Concealed hinges.
 - Black zinc die cast comproof/padlocking handle on main door with black zinc die cast padlocking handle on slave doors.
 - 3-point latching mechanism.
 - Ends of latch rods have ramp shoes for easier door closing.
 - Panel supports.
 - Large removable print pockets.
 - Oil-resistant gasket.
 - Removable sub-panels mount on collar studs.
 - Defeater on master door requires a screwdriver to open.
 - Hole plugs provided to seal holes in bottom of enclosure.
 - Ground stud on door and body.
 - Provisions for light kit.
- Disconnect switch (or circuit breaker) and operating mechanism are not furnished with enclosure.**

Finish -
ANSI-61 gray powder coated inside and out. Sub-panels powder coated white.

IS3 - Industry Standards -
NEMA Type 3R, 12 & Type 13
UL Listed Type 3R & 12
CSA Type 3R & 12
IEC 60529 IP55

IS4 - Industry Standards -
NEMA Type 3R, 4, 12 & Type 13
UL Listed Type 3R, 4 & 12
CSA Type 3R, 4 & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS5 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the technical information section.