

Stainless Steel 30.5 mm Pushbutton Enclosures


Application -
 Designed to house standard pushbuttons, switches and pilot lights in wet and hoisted down areas and in corrosive atmospheres. For installation information, consult our Installation Manual at www.saginawcontrol.com.

- Construction -**
- 0.063" stainless steel, Type 304.
 - Seams continuously welded and ground smooth.
 - Captivated cover screws thread into sealed wells.
 - 4-way pushbutton holes accept all brands of oil-tight pushbuttons, switches and pilot lights. Hole diameter 1.20" (30.5 mm).
 - Immediate removal of cover is permitted.
 - Oil-resistant door gasket.

Options -
 Can be special ordered in Type 316/316L stainless steel.

Finish -
 #4 brushed finish on all exterior surfaces.


- IS6 - Industry Standards -**
 NEMA Type 4, 4X, 12 & Type 13
 UL Listed Type 4, 4X & 12
 CSA Type 4, 4X & 12
 IEC 60529 IP66



STAINLESS STEEL 30.5 mm PUSHBUTTON ENCLOSURES

Catalog No.	ENCLOSURE PRODUCT CODE S1			Industry Standard	List Price
	Height (A)	Width (B)	Depth (C)		
SCE-1PBSS	3.50	3.25	2.75	IS6	134.38
SCE-1PBXSS	4.00	4.00	4.75	IS6	179.00
SCE-2PBSS	5.75	3.25	2.75	IS6	168.31
SCE-2PBXSS	6.00	4.00	4.75	IS6	224.05
SCE-3PBSS	8.00	3.25	2.75	IS6	183.25
SCE-4PBSS	10.25	3.25	2.75	IS6	207.67
SCE-4PBXSS	10.00	4.00	4.75	IS6	247.05
SCE-4SPBSS	7.25	6.25	3.00	IS6	228.03
SCE-6PBSS	9.50	6.25	3.00	IS6	272.84
SCE-6PBXSS	9.50	8.50	3.00	IS6	308.12
SCE-12PBSS	11.75	10.75	4.75	IS6	351.56
SCE-12PBXSS	11.75	10.75	4.75	IS6	442.51

Available within 10 working days if not in stock

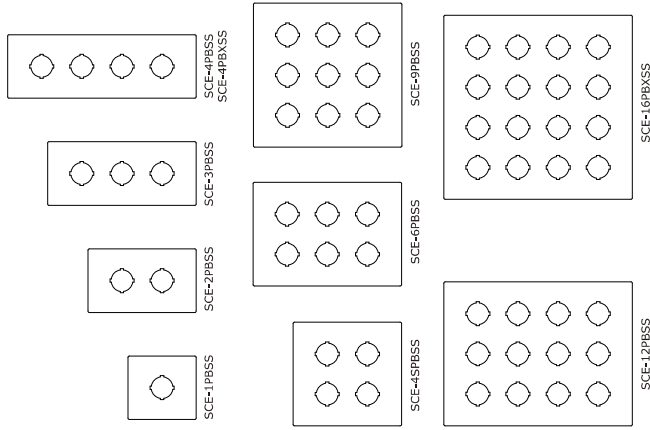


Back to SS Wall-Mount Enclosures

Phone (989) 799-6871
 Fax (989) 799-4524




STAINLESS STEEL 30.5 mm PUSHBUTTON ENCLOSURES

TECHNICAL DATA

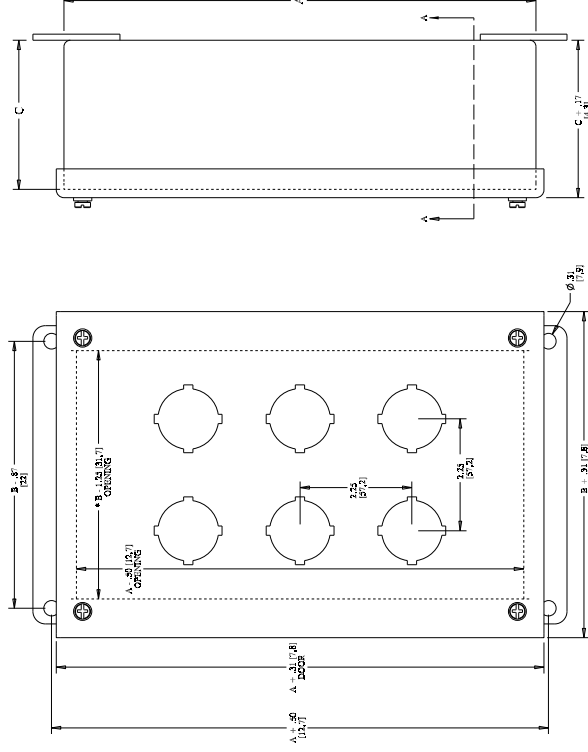

NOTE: #4 FINISH ONE COLUMN OF PUSHBUTTONS



Phone (989) 799-6871
 Fax (989) 799-4524

