

### Stainless Steel EnviroLine® Series Two-Door Sloping Top Enclosures

**Application -**  
Designed to house electrical and electronic controls, instrumentation and components in indoor, outdoor and sanitary locations. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

**Construction -**


- 0.104" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- 15 Degree Sloping Top.
- Removable center post.
- Heavy duty fitting eyes anchor into reinforced top.
- Body stiffeners.
- Black quarter turn latches as required.
- Stainless steel concealed hinges.
- 3-point latching mechanism.
- Removable print pocket on main door of disconnect enclosures.
- Provisions for floor stands.
- Panel supports.
- Oil & water resistant gasket.
- Ground stud on door and body.

**Finish -**

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.


**ISS - Industry Standards -**

- NEMA Type 4, 4X, 12 & Type 13
- UL Listed Type 4, 4X & 12
- CSA Type 4, 4X & 12
- IEC 60529 IP66




### STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR SLOPING TOP ENCLOSURES

#### TECHNICAL DATA

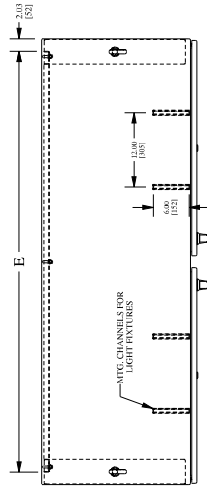

**LATCH NOTE:**  
Omit center latch top and bottom of door when door width is < 30.00 [762]

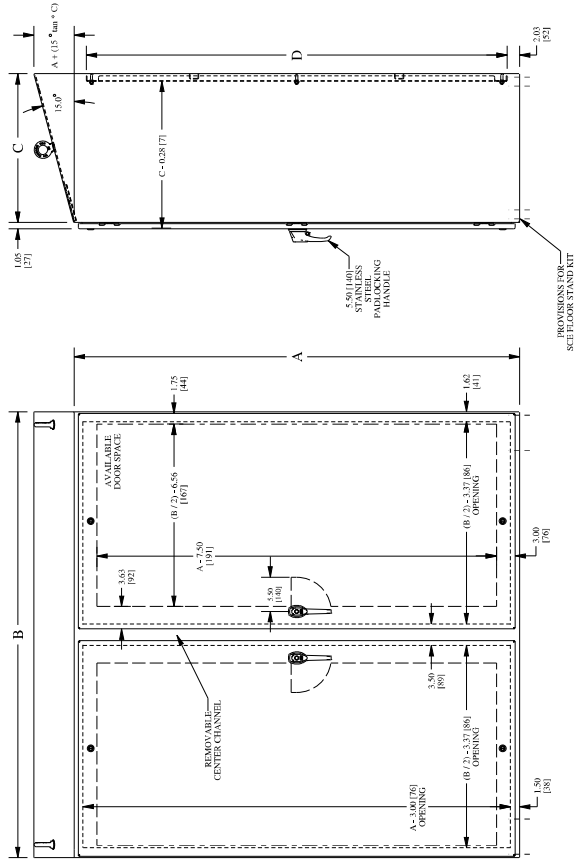

Phone (989) 799-6871  
Fax (989) 799-4524



Back to  
SS Free-Standing  
Enclosures

Phone (989) 799-6871  
Fax (989) 799-4524

