

Enviroline® Series 304 & 316 Stainless Steel Two-Door Disconnect Enclosures

Application -
Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com. For outdoor application a drip shield is recommended.

Construction -

- 0.104" stainless steel Type 304 & 316/316L.
- Seams continuously wetted and ground smooth.
- Oil-resistant gasket.
- Flange trough collar around all sides of door opening.
- Stainless steel concealed hinge.
- Removable and interchangeable doors.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Removable print pocket.
- Lifting eyes for easy handling.
- Ground studs on door and body.
- Collar studs provided for mounting optional sub-panels.
- 15" removable floor stands.
- Removable center post.
- Mechanical interlock.
- Black zinc die cast coilproof/padlocking handle on main door of disconnect enclosures.
- Black zinc die cast padlocking handle on all other doors.

Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.

Finish -
#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

IS5 - Industry Standards -
NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66



Available within 10 working days / not in stock


Phone (989) 799-6871
Fax (989) 799-4524



Your Enclosure Source®


Back to
SS Free-Standing
Enclosures

STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS TECHNICAL DATA

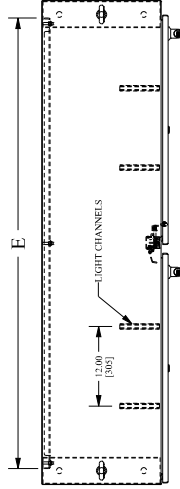

DISCONNECT NOTES:
F = 7.88 [200] when A = 60.00 [1524]
F = 13.38 [340] when A = 72.00 [1829]

LATCH NOTES:
LATCHES are 3.00 [76.2] in width have additional latch centered top and bottom of door.

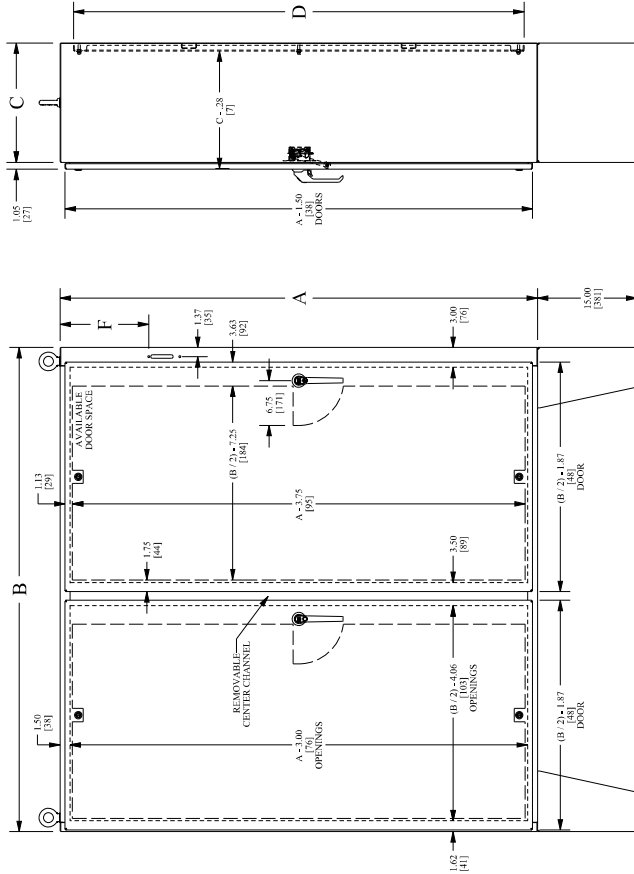

Phone (989) 799-6871
Fax (989) 799-4524

Your Enclosure Source®

316 STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR ENCLOSURES FOR FLANGE-MOUNTED DISCONNECTS

ENCLOSURE PRODUCT CODE S7				SUB-PANEL (P3)					
Catalog No.	Height (A)	Width (B)	Depth (C) Standard	List Price	Industry Standard	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60XEL4912SSLP	60.00	49.00	12.00	IS5 9,716.01	IS5 9,716.01	SCE-60P48	56.00	44.00	288.38
SCE-60XEL4918SSLP	60.00	49.00	18.00	IS5 10,584.18	IS5 10,584.18	SCE-60P48	56.00	44.00	288.38
SCE-60XEL6112SSLP	60.00	61.00	12.00	IS5 10,864.35	IS5 10,864.35	SCE-60P60	56.00	56.00	331.68
SCE-60XEL6118SSLP	60.00	61.00	18.00	IS5 11,831.85	IS5 11,831.85	SCE-60P60	56.00	56.00	331.68
SCE-72XEL7312SSLP	72.00	61.00	12.00	IS5 12,033.85	IS5 12,033.85	SCE-72P60	66.00	56.00	394.98
SCE-72XEL7318SSLP	72.00	61.00	18.00	IS5 13,073.05	IS5 13,073.05	SCE-72P60	66.00	56.00	394.98
SCE-72XEL7318SSLP	72.00	73.00	12.00	IS5 13,966.23	IS5 13,966.23	SCE-72P72	66.00	68.00	470.93
SCE-72XEL7318SSLP	72.00	73.00	18.00	IS5 13,848.87	IS5 13,848.87	SCE-72P72	66.00	68.00	470.93
SCE-72XEL7324SSLP	72.00	73.00	24.00	IS5 14,518.44	IS5 14,518.44	SCE-72P72	66.00	68.00	470.93

Available within 10 working days / not in stock

Phone (989) 799-6871
Fax (989) 799-4524



Your Enclosure Source®

Back to
SS Free-Standing
Enclosures