


Stainless Steel EnviroLine® Series Two-Door Sloping Top Disconnect Enclosures

Application -
Designed to house most standard type disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" stainless steel Type 304.
 - Seams continuously welded and ground smooth.
 - Flange trough collar around all sides of door opening.
 - 15 Degree Sloping Top.
 - Removable center post.
 - Heavy duty lifting eyes anchor into reinforced top.
 - Body stiffeners.
 - Stainless steel concealed hinges.
 - Mechanical interlock.
 - Stainless steel comproof/padlocking handle on main door with stainless steel padlocking handle on slave doors.
 - 3-point latching mechanism.
 - Black quarter turn latches as required.
 - Removable print pocket on main door of disconnect enclosures.
 - Provisions for floor stands.
 - Panel supports.
 - Oil & water resistant gasket.
 - Ground stud on door and body.
- Disconnect switch (or circuit breaker) and operating mechanism are not furnished with this enclosure.**



Finish -
#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.


IS6 - Industry Standards -
NEMA Type 4, 4X, 12 & Type 13
UL Listed Type 4, 4X & 12
CSA Type 4, 4X & 12
IEC 60529 IP66

Phone (989) 799-6871
Fax (989) 799-4524




Back to
SS Free-Standing
Enclosures

STAINLESS STEEL ENVIROLINE® SERIES TWO-DOOR SLOPING TOP DISCONNECT ENCLOSURES TECHNICAL DATA

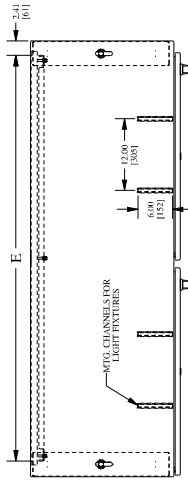

DISCONNECT NOTES:
F = 7.88 (200) when A = 60.00 (1524)
F = 13.38 (340) when A = 72.00 (1829)

LATCH NOTE:
Over center latch on and bottom of door when door width is < 30.00 (762)

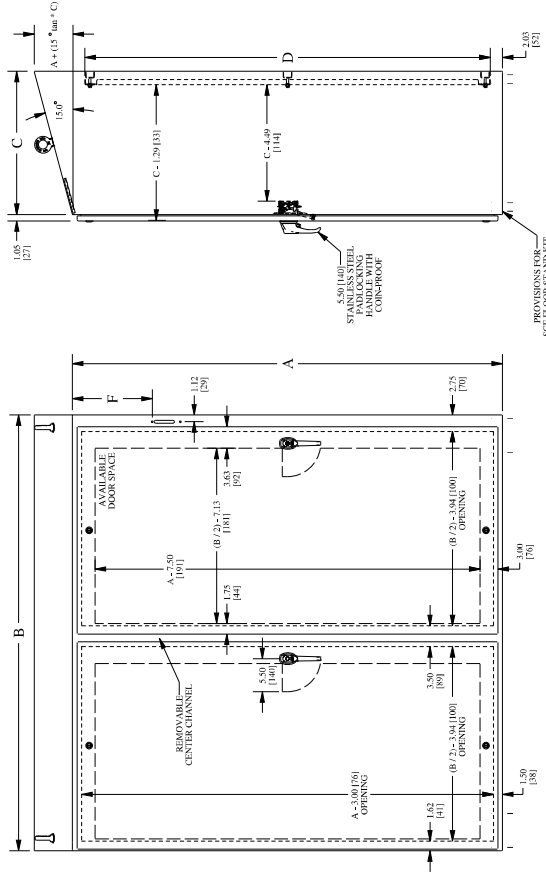

Phone (989) 799-6871
Fax (989) 799-4524



Back to
SS Free-Standing
Enclosures