

Thermal Management

Cooling Fans

Designed for use in enclosures where space is limited and reliable cooling is required. 115 or 230 volt AC 60/50hz. Single phase motor. A finger guard is included. UL listed motor.


Catalog No.	Air Flow CU Feet Per Min.	Diameter	Fan Dim. Square	Depth	Product Code	List Price
SCE-CF4	108	4.69	4.69	1.52	P2	60.94
SCE-CF6	235	6.72	6.72	2.00	P2	153.98
SCE-CF10	550	10.00	10.00	3.50	P2	161.43
SCE-CF4-230	108	4.69	4.69	1.52	P2	66.95
SCE-CF6-230	235	6.72	6.72	2.00	P2	170.55
SCE-CF10-230	550	10.00	10.00	3.50	P2	177.58



Finger Guards

A finger guard is included with each cooling fan. An additional finger guard can be mounted on either of the fans for maximum safety. Chrome plated.


Catalog No.	Use on Cooling Fan Cat. No.	Product Code	List Price
SCE-GARD4	SCE-CF4	P2	17.38
SCE-GARD6	SCE-CF6	P2	21.11
SCE-GARD10	SCE-CF10	P2	26.08



Cooling Fan Bracket

Cooling fan brackets are designed for general circulation or to direct air in a problem area. Brackets are made of heavy gauge steel and powder coated white. Fans and finger guards are ordered separately.

Catalog No.	Description	Height (A)	Width (B)	Depth (C)	(E)	(F)	(J)	Product Code	List Price
SCE-112389	4" Fan Bracket	6.00	5.00	1.50	-	3.00	0.62	P2	20.52
SCE-11252	6" Fan Bracket	10.00	6.88	2.00	-	5.00	1.00	P2	24.31
SCE-110551	10" Fan Bracket	13.50	10.12	3.50	4.00	4.00	2.00	P2	44.52

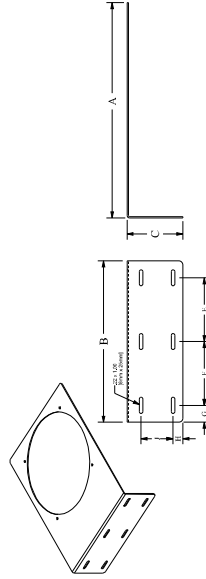

Phone (889) 799-6871
Fax (889) 799-4524



Thermal Management

Anti-Condensation Heater

Helps prevent condensation thus preventing corrosion and keeping electrical equipment on line. "AHC" Touch Safe Series Anti-Condensation Space heater is designed to keep the temperature inside of an enclosure several degrees above the external ambient temperature and above the dew point. There are no moving parts, no thermostat to set or malfunction, and no adjustments are needed for ambient temperature changes. Easy to install, with two wires to connect and two mounting screws. Made of extruded black anodized aluminum. Operating temperatures -30°C to 60°C, 120VAC. When possible, two smaller units are more efficient than one larger unit. For technical information consult our Installation Manual at www.saginawcontrol.com.



Catalog No.	Description	AMP	WATTS	Product Code	List Price
SCE-AHC15	Heater	.125 MA	15	P2	108.03
SCE-AHC30	Heater	.250 MA	30	P2	108.03
SCE-AHC50	Heater	.416 MA	50	P2	108.03

Fan Heater with Thermostat

Designed to protect electrical controls, instruments and sensitive components from low temperatures and the effects of condensation and corrosion by maintaining a stable temperature within the electrical enclosure. These heaters are not intended for use in hazardous, wet, dusty or dirty locations. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Catalog No.	Watt @ 60 Hz	Volt	Height	Width	Depth
SCE-HF125/A	125	115	5.50	4.00	4.50
SCE-HF125/A	125	230	5.50	4.00	4.50
SCE-HF200/A	200	115	5.50	4.00	4.50
SCE-HF200/A	200	230	5.50	4.00	4.50
SCE-HF400/B	400	115	7.50	4.00	4.50
SCE-HF400/B	400	230	7.50	4.00	4.50
SCE-HF800/B	800	115	7.50	4.00	4.50
SCE-HF800/B	800	230	7.50	4.00	4.50



- Brushed Aluminum Housing
- Thermostat Range 0° to 100°F (-18° to 38°C)
- Heat discharge at the top of the heater
- Panel mount
- Air volume of 16 CFM on 125 & 200 Watt heaters, 26 CFM on 400 & 800 Watt heaters
- Heat Indicator Light
- Switch for Auto or Fan
- UL Recognized
- CSA-Approved
- CE

[Back to Accessories](#)

Phone (889) 799-6871
Fax (889) 799-4524

