GENERAL ACCESSORIES

LED Light Fixture

Application -
LED light fixture is designed to provide interior lighting for an enclosure. Can be mounted to light channels in the top of an enclosure or on the front flange of most enclosures. Door activated adjustable switch, switch can be removed and relocated. Terminal block on each end of fixture, making it easy to wire and daisy chain multiple lights continuously. LED bulb with PVC frosted white protective light diffuser included. Housing made from steel and powder coated white. Units with convenience receptacle outlet are 120 VAC with ground 50/60 HZ. Without convenience receptacle outlet 100 to 277 VAC 50/60 HZ.

Construction -
- 4000K Frosted White
- 18 inch 850 Lumens
- 24 inch 900 Lumens

IS10 - Industry Standards -
UL Component Recognized

Catalog No.		Height (A)	Width (B)	Depth (C)	AMP	VAC	Hz	Product Code	List Price
SCE-LF18		2.75	18.18	4.00	0.105	100-125	50/60	P2	206.55
SCE-LF24		2.75	24.18	4.00	0.105	100-125	50/60	P2	218.03
SCE-LF18NO	(No Outlet)	2.75	18.18	4.00	0.105	100-240	50/60	P2	185.90
SCE-LF24NO	(No Outlet)	2.75	24.18	4.00	0.105	100-240	50/60	P2	196.72
SCE-LF1824VDC		2.75	18.18	4.00	0.300	24VDC	—	P2	195.90



Light Switch Mounting Bracket

Designed to remote mount the door activated light switch when space is limited. Light Switch Mounting Bracket may be used with SCE-LF18, SCE-LF18NO, SCE-LF24 & SCE-LF24NO. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Catalog No.	Height (A)	Width (B)	Depth (C)	Product Code	List Price
SCE-LSMB	2.00	2.68	1.00	P2	25.56

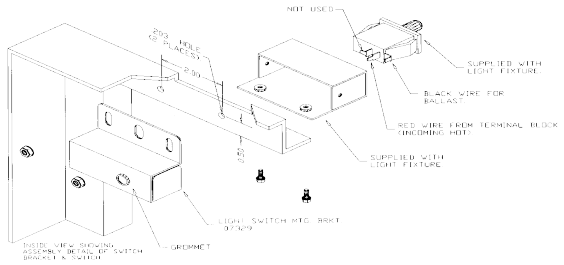

Full Light Switch Assembly

Designed to remote mount the light switch when space is limited.

Catalog No.	Product Code	List Price
SCE-LSA	P2	38.34

Phone (989) 799-6871
Fax (989) 799-4524

GENERAL ACCESSORIES

Oil Tight Hole Seals

Extra push button holes can be sealed against dust, dirt, oil, and water with a SCE hole seal. Seals will cover most pushbutton hole sizes. Hole seals come with oil-resistant gasket, #10-32 x 3/8" stud, zinc plated wing nut and plated steel back plate. Available in stainless steel or ANSI-61 gray powder coated finish.

Catalog No.	Description	Diameter Inches	Diameter MM	Max. Hole Diameter Inches	Max. Hole Diameter MM	Quantity Per Kit	Product Code	List Price
SCE-ASPB-09	Steel	1.75	44	1.25	30	1	P2	5.13
SCE-ASPBG-09	Steel	1.22	31	.875	22	1	P2	3.63
SCE-ASPB-SS	Stainless Steel	1.75	44	1.25	30	1	P2	19.13
SCE-ASPBG-SS	Stainless Steel	1.22	31	.875	22	1	P2	17.88



Hole Seals

Extra pushbutton holes can be sealed against dust, dirt, oil and water. Hole seals are made of corrosion and UV resistant fiberglass, and supplied with gasket and backing nut.

UL recognized 3, 4, 4X, 12, 6P
IEC tested to IP66 and IP68

Catalog No.	Outside Diameter	Min. Hole Size	Max. Hole Size	Product Code
SCE-HPSERIES1	1.00	0.50	0.81	F1
SCE-HPSERIES15	1.20	0.88	0.88	F1
SCE-HPSERIES2	1.50	1.00	1.28	F1
SCE-HPSERIES3	2.00	1.38	1.75	F1
SCE-HPSERIES4	2.75	2.00	2.56	F1

Phone (989) 799-6871
Fax (989) 799-4524

Back to Accessories

9 General Accessories