

## Protective Access Enclosures

### Hinged Window Enclosure

Designed to mount on the exterior of an enclosure to provide protection for controls with easy access. Concealed hinges, Black mini quarter turn latches. Polycarbonate viewing window. Gasket and hardware included. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com). Made of heavy gauge carbon steel and powder coated ANSI-61 gray. "SS" parts made of heavy gauge stainless steel. Type 304 with #4 brushed finish.

**IS1 - Industry Standards -**  
NEMA Type 12 & Type 13  
UL Listed Type 12  
CSA Type 12  
IEC 60529 IP 55

**IS2 - Industry Standards -**  
NEMA Type 4, 12 & Type 13  
UL Listed Type 4 & 12  
CSA Type 4 & 12  
IEC 60529 IP66

**IS5 - Industry Standards -**  
NEMA Type 4, 4X, 12 & Type 13  
UL Listed Type 4, 4X & 12  
CSA Type 4, 4X & 12  
IEC 60529 IP66

### Hinged Access Enclosure

Designed to house electrical controls, instruments and components used in an indoor or outdoor environment to provide a degree of protection for the equipment inside the enclosure against ingress of solid foreign objects (falling dirt), and provide a degree of protection with respect to the harmful effects on the equipment due to the ingress of water (rain, sleet, snow).

**IS2 - Industry Standards -**  
NEMA Type 4, 12 & Type 13  
UL Listed Type 4 & 12  
CSA Type 4 & 12  
IEC 60529 IP66

**IS5 - Industry Standards -**  
NEMA Type 4, 4X, 12 & Type 13  
UL Listed Type 4, 4X & 12  
CSA Type 4, 4X & 12  
IEC 60529 IP66

Catalog No.	Height (A)	Width (B)	Depth (C)	Number Windows	Viewing Area Height x Width	Industry Standard	List Price
SCE-HWK1212	12.00	12.00	1.50	1	8.00 x 7.38	IS2	P6 310.45
SCE-HWK1814	18.00	14.00	1.50	1	14.00 x 9.38	IS2	P6 380.12
SCE-HWK2218	22.00	18.00	1.50	1	18.00 x 13.38	IS1	P6 434.63
SCE-HWK2228	22.00	28.00	1.50	2	18.00 x 10.56	IS1	P6 496.72
SCE-HWK2822	28.00	22.00	1.50	2	10.88 x 17.38	IS1	P6 496.72

#### Stainless Steel

SCE-HWK1212SS	12.00	12.00	1.50	1	8.00 x 7.38	IS5	P6 640.77
SCE-HWK1814SS	18.00	14.00	1.50	1	14.00 x 9.38	IS5	P6 889.25
SCE-HWK2218SS	22.00	18.00	1.50	1	18.00 x 13.38	IS1	P6 1,048.07
SCE-HWK2228SS	22.00	28.00	1.50	2	18.00 x 10.56	IS1	P6 1,266.42
SCE-HWK2822SS	28.00	22.00	1.50	2	10.88 x 17.38	IS1	P6 1,266.42



SCE-HWK1212(SS)  
SCE-HWK1814(SS)  
SCE-HWK2218(SS)



SCE-HWK2228(SS)



SCE-HWK2822(SS)

Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	Product Code	List Price
SCE-HA1010	10.00	10.00	1.50	IS2	P6	247.95
SCE-HA1212	12.00	12.00	1.50	IS2	P6	268.92
SCE-HA1814	18.00	14.00	1.50	IS2	P6	318.22

#### Stainless Steel


SCE-HA1010SS	10.00	10.00	1.50	IS5	P6	586.45
SCE-HA1212SS	12.00	12.00	1.50	IS5	P6	592.52
SCE-HA1814SS	18.00	14.00	1.50	IS5	P6	811.61




SCE-HA1010



SCE-HA1212



SCE-HA1814



## TYPE 1 INTERNAL DISCONNECT ENCLOSURE

Catalog No.	Description	Height	Width	Depth of Enclosure	Min Depth of Enclosure	Product Code	List Price
SCE-50AFSD	30 to 60 amp Non-Fusible Disconnect & Small Circuit Breaker	13.50	12.00	6.50	10 inches	P2	171.23
SCE-100AFSD	30 to 100 amp Fusible Disconnect & Large Circuit Breaker	22.00	12.00	6.50	10 inches	P2	183.20
SCE-400AFSD	200 to 600 amp Fusible & Non-Fusible Disconnects	32.00	15.00	9.75	16 inches	P2	208.76

## Protective Access Enclosures

### INTERNAL DISCONNECT ENCLOSURE

**Application -**  
Designed for use with enclosures that require additional protection against Arc Flash. This enclosure can be used within an environmentally rated enclosure to isolate the main power supply. Increasing personal protection by preventing incidental contact or exposure to the high voltage arc flash and shock hazard, and potentially reducing the PPE level for the lower risk components when the Internal Disconnect Enclosure cover is closed. The Internal Disconnect Enclosure can be easily incorporated into a new system or added to a pre-existing system on variable depth or cable operated disconnects. Aids in achieving compliance with NFPA 70E by concealing main power supply. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).


### Construction -

- 0.060" carbon steel
- Enclosures are symmetrical for use with left or right hand disconnects.
- Removable continuous hinges.
- 110 degree door stop prevents incidental contact with other components.
- Black quarter turn latch.
- Black spring loaded quarter turn latch with 7mm square insert and key.
- Latches automatically when door is closed.
- Gland plate top and bottom provides easy installation of wires.
- Mounting holes provided in back for securing to the sub-panel.
- Ground stud on door and body.

### Finish -

- Orange Texture powder coated inside and out.

**IS8 - Industry Standards -**  
Nema Type 1  
UL Listed Type 1  
CSA Type 1  
IEC 60529 IP 30

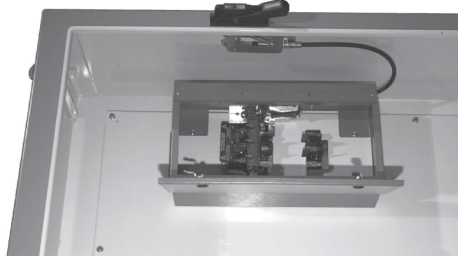

[Back to Accessories](#)

Phone (989) 799-6871  
Fax (989) 799-4524

