

Vented Type 3R Disconnect Enclosure

Application -
Designed to house electrical controls, drives, instruments and components used in an outdoor environment to provide a degree of protection for the equipment inside the enclosure against ingress of solid foreign objects (falling dirt), and provide a degree of protection with respect to the harmful effects on the equipment due to the ingress of water (rain, sleet, snow). Designed to house most standard disconnects. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -


- 0.075" galvanized steel.
- 3-point latching mechanism.
- Provisions for sub-panel.
- Doors open 180 degrees.
- Disconnect cutout provided on flange.
- Concealed hinges.
- Vented top hood with bug screen.
- Top mounted fans.
- Vented rain hood with filter kits in door.
- Din Rail mounting provisions inside top for installation of thermostat and terminals.
- Oil resistant gasket.
- Ground studs on door and body.
- Mounting holes for optional mounting straps.
- 3/8-16 grounding kit.
- Sub-panel mounting hardware included.
- 115 volt fan.
- Black zinc die cast coinproof/padlocking handle.

Finish -

White powder coated inside and out. Optional sub-panels are powder coated white.

IS7 - Industry Standards -

NEMA Type 3R
UL Listed Type 3R
CSA Type 3R
IEC 60529 IP32




Phone (989) 799-6871
Fax (989) 799-4524

Back to
Wall-Mount
Enclosures

SCE
SAGINAW
CONTROL &
ENGINEERING
Your Enclosure Source™

VENTED TYPE 3R DISCONNECT ENCLOSURES TECHNICAL DATA

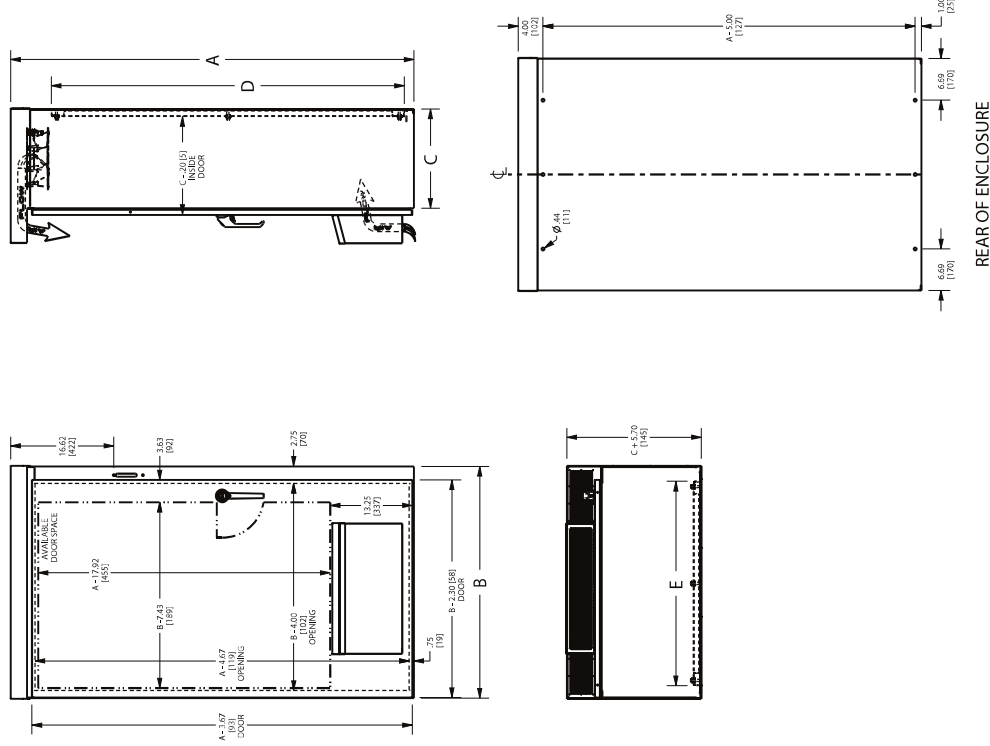

Phone (989) 799-6871
Fax (989) 799-4524

SCE
SAGINAW
CONTROL &
ENGINEERING
Your Enclosure Source™