

Vented Type 3R Enclosure

Application -
Designed to house electrical controls, drives, instruments and components used in an outdoor environment to provide a degree of protection for the equipment inside the enclosure against ingress of solid foreign objects (falling dirt), and provide a degree of protection with respect to the harmful effects on the equipment due to the ingress of water (rain, sleet, snow). For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" galvanized steel.
- Black quarter turn latches and padlock wing knob.
- Provisions for sub-panel.
- Doors open 180 degrees.
- Concealed hinges.
- Vented top hood with bug screen.
- Top mounted fans.
- Vented rain hood with filter kits in door.
- Din Rail mounting provisions inside top for installation of thermostat and terminals.
- Oil resistant gasket.
- Ground studs on door and body.
- Mounting holes for optional mounting straps.
- 3/8-16 grounding kit.
- Sub-panel mounting hardware included.
- 115 volt fan.

Finish -

White powder coated inside and out. Optional sub-panels are powder coated white.

IS7 - Industry Standards -

- NEMA Type 3R
- UL Listed Type 3R
- CSA Type 3R
- IEC 60529 IP32



VENTED TYPE 3R ENCLOSURES



Catalog No.	ENCLOSURE PRODUCT CODE N3							List Price	Sub-Panel	
	Height (A)	Width (B)	Depth (C)	Fan Qty.	Fan Size	Filter Qty.	Filter Size			
SCE-29/R2412	29.00	24.00	12.00	1	107	FLT66	2	IS7	672.08	SCE-24P24
SCE-35/R2412	35.00	24.00	12.00	6	107	FLT66	2	IS7	751.88	SCE-30P24
SCE-41/R2412	41.00	24.00	12.00	6	107	FLT66	2	IS7	850.26	SCE-38P24
SCE-47/R2414	47.00	24.00	14.00	1	300	FLT66	2	IS7	1,027.03	SCE-40P24
SCE-53/R3616	53.00	36.00	16.00	1	300	FLT88	2	IS7	1,652.13	SCE-48P36
SCE-65/R3616	65.00	36.00	16.00	2	600	FLT88	2	IS7	1,868.78	SCE-60P36

Phone (989) 799-6871
Fax (989) 799-4524



Your Enclosure Source™

VENTED TYPE 3R ENCLOSURES
TECHNICAL DATA

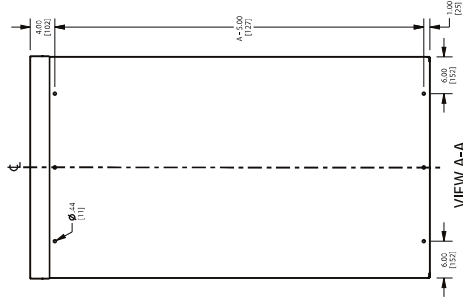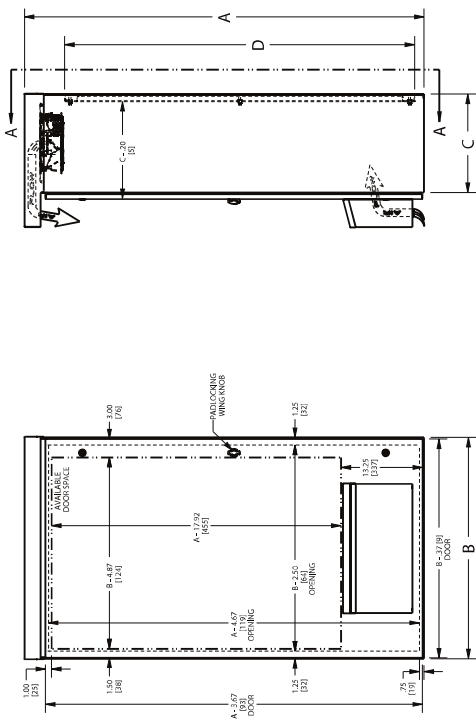

Phone (989) 799-6871
Fax (989) 799-4524



Your Enclosure Source™